


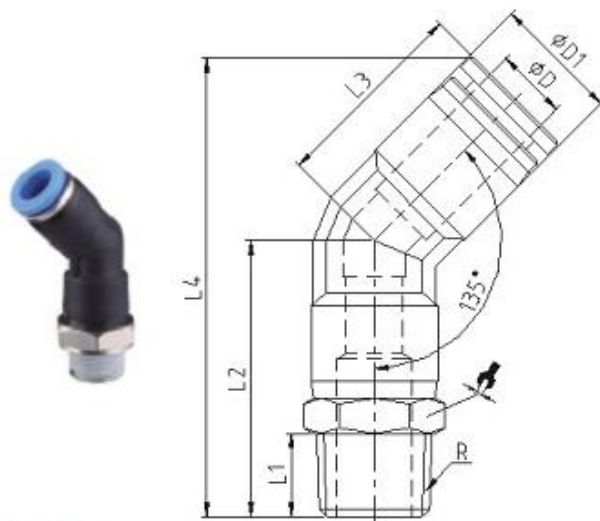

Features

- *One-touch tube fittings are used in pneumatic piping.
- *The tube fittings come in a wide variety of models to meet all your needs in pneumatic piping.
- *Even after installation, the direction of the tube can be changed freely.
- *Nickel-Plated metal body ensures anti-corrosion and anti-contamination.
- *All R and NPT threads are pre-coated sealant.

Specifications

Fluid Type	Air (No other type of gas or liquid)	
Working Pressure Range	0~150PSI	0~9.9Kgf/cm ² (0~990KPa)
Negative Pressure	-29.5 in Hg	-750mm Hg (10 Torr)
Working Temperature	32~140°F	0~60°C

MODEL	ΦD	R	L1	L2	L3	L4	ΦD1	✎
APL45 04-M5	4	M5	3.5	22.5	19	39.5	11.3	10
APL45 04-M6	4	M6	4	23.5	19	40.5	11.3	10
APL45 04-01	4	R1/8	7.5	25	19	42	11.3	10
APL45 04-02	4	R1/4	9.5	28	19	45	11.3	14
APL45 04-03	4	R3/8	10.5	29.5	19	46.5	11.3	17
APL45 06-M5	6	M5	3.5	22.5	19.2	40.5	13.3	12
APL45 06-M6	6	M6	4	23.5	19.2	41.5	13.3	12
APL45 06-01	6	R1/8	7.5	25.5	19.2	43.5	13.3	12
APL45 06-02	6	R1/4	9.5	28	19.2	46	13.3	14
APL45 06-03	6	R3/8	10.5	29.5	19.2	47.5	13.3	17
APL45 06-04	6	R1/2	13.5	33	19.2	51	13.3	21
APL45 08-01	8	R1/8	7.5	29.5	22.5	50	14.8	14
APL45 08-02	8	R1/4	9.5	31.5	22.5	52	14.8	14
APL45 08-03	8	R3/8	10.5	33	22.5	53.5	14.8	17
APL45 08-04	8	R1/2	13.5	36.5	22.5	57	14.8	21
APL45 10-01	10	R1/8	7.5	34	27.8	60.5	18.7	17
APL45 10-02	10	R1/4	9.5	36	27.8	62.5	18.7	17
APL45 10-03	10	R3/8	10.5	37	27.8	63.5	18.7	17
APL45 10-04	10	R1/2	13.5	40.5	27.8	67	18.7	21
APL45 12-01	12	R1/8	7.5	36	29.5	64	21.3	21
APL45 12-02	12	R1/4	9.5	38.5	29.5	66.5	21.3	21
APL45 12-03	12	R3/8	10.5	39.5	29.5	67.5	21.3	21
APL45 12-04	12	R1/2	13.5	42.5	29.5	70.5	21.3	21