


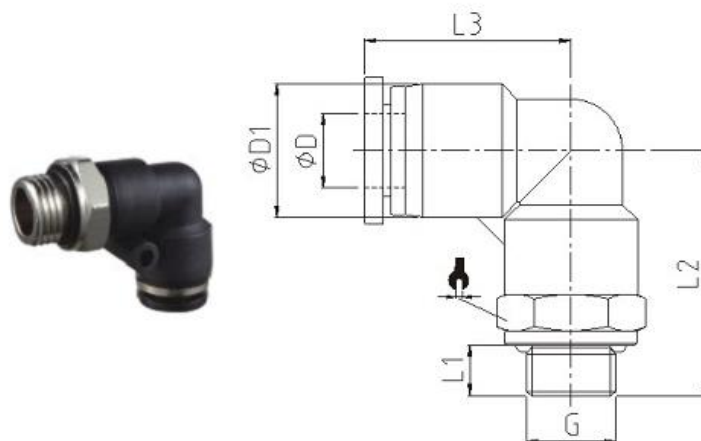

Features

- *One-touch tube fittings are used in pneumatic piping.
- *The tube fittings come in a wide variety of models to meet all your needs in pneumatic piping.
- *Even after installation, the direction of the tube can be changed freely.
- *Nickel-Plated metal body ensures anti-corrosion and anti-contamination.
- *All R and NPT threads are pre-coated sealant.

Specifications

Fluid Type	Air (No other type of gas or liquid)	
Working Pressure Range	0~150PSI	0~9.9Kgf/cm ² (0~990KPa)
Negative Pressure	-29.5 in Hg	-750mm Hg (10 Torr)
Working Temperature	32~140°F	0~60°C

MODEL	ΦD	G	L1	L2	L3	ΦD1	↗
APL04-G01	4	G1/8	5.5	24.3	19	11.5	14
APL04-G02	4	G1/4	7.5	26.8	19	11.5	17
APL06-G01	6	G1/8	5.5	24.2	19.2	13.5	14
APL06-G02	6	G1/4	7.5	26.7	19.2	13.5	17
APL06-G03	6	G3/8	7.5	27.2	19.2	13.5	20
APL06-G04	6	G1/2	10	29.7	19.2	13.5	24
APL08-G01	8	G1/8	5.5	27	22.5	15	14
APL08-G02	8	G1/4	7.5	29.5	22.5	15	17
APL08-G03	8	G3/8	7.5	30	22.5	15	20
APL08-G04	8	G1/2	10	32.5	22.5	15	24
APL10-G01	10	G1/8	5.5	31.8	27.8	19	17
APL10-G02	10	G1/4	7.5	34.3	27.8	19	17
APL10-G03	10	G3/8	7.5	34.3	27.8	19	20
APL10-G04	10	G1/2	10	37.8	27.8	19	24
APL12-G01	12	G1/8	5.5	33.5	29.5	21.5	21
APL12-G02	12	G1/4	7.5	36	29.5	21.5	21
APL12-G03	12	G3/8	7.5	36	29.5	21.5	21
APL12-G04	12	G1/2	10	39	29.5	21.5	24
APL14-G03	14	G3/8	7.5	39	30.5	23.5	22
APL14-G04	14	G1/2	10	42.5	30.5	23.5	24
APL15-G03	15	G3/8	7.5	42.5	33	26.5	24
APL15-G04	15	G1/2	10	44.5	33	26.5	24
APL16-G03	16	G3/8	7.5	42.5	33	26.5	24
APL16-G04	16	G1/2	10	44.5	33	26.5	24