


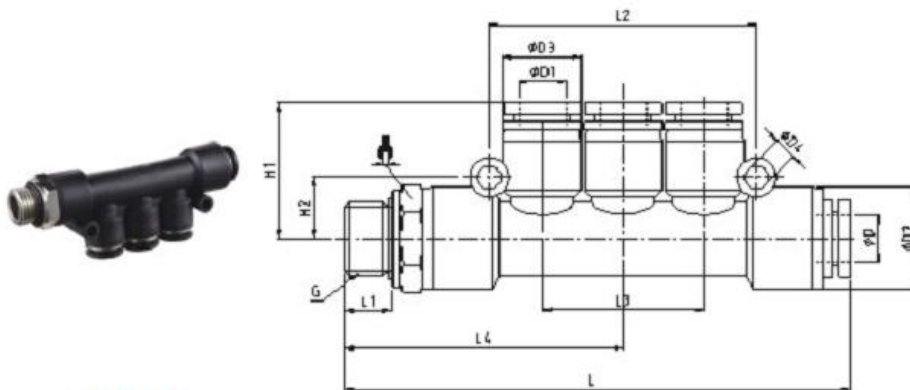

Features

- *One-touch tube fittings are used in pneumatic piping.
- *The tube fittings come in a wide variety of models to meet all your needs in pneumatic piping.
- *Even after installation, the direction of the tube can be changed freely.
- *Nickel-Plated metal body ensures anti-corrosion and anti-contamination.
- *All R and NPT threads are pre-coated sealant.

Specifications

Fluid Type	Air (No other type of gas or liquid)	
Working Pressure Range	0~150PSI	0~9.9Kgf/cm ² (0~990KPa)
Negative Pressure	-29.5 in Hg	-750mm Hg (10 Torr)
Working Temperature	32~140°F	0~60°C

MODEL	ΦD	G	ΦD1	ΦD2	ΦD3	ΦD4	H1	H2	L1	L2	L3	L4	
APKD04-G01	4	G1/8	4	14.5	13	3.2	19	9	68	5.5	42	26	14
APKD04-G02	4	G1/4	4	14.5	13	3.2	19	9	70	7.5	42	26	17
APKD06-G01	6	G1/8	6	14.5	13	3.2	20.5	9	68	5.5	42	26	14
APKD06-G02	6	G1/4	6	14.5	13	3.2	20.5	9	70	7.5	42	26	17
APKD06-G03	6	G3/8	6	14.5	13	3.2	20.5	9	70.5	7.5	42	26	20
APKD06-G04	6	G1/2	6	14.5	13	3.2	20.5	9	73	10	42	26	24
APKD08-G01	8	G1/8	8	18.4	14.5	3.2	24	11	87	5.5	48	29	14
APKD08-G02	8	G1/4	8	18.4	14.5	3.2	24	11	89	7.5	48	29	17
APKD08-G03	8	G3/8	8	18.4	14.5	3.2	24	11	89.5	7.5	48	29	20
APKD08-G04	8	G1/2	8	18.4	14.5	3.2	24	11	92.5	10	48	29	24
APKD10-G01	10	G1/8	10	18.4	18.4	4.2	27.5	12	95.5	5.5	60.8	37	17
APKD10-G02	10	G1/4	10	18.4	18.4	4.2	27.5	12	98	7.5	60.8	37	17
APKD10-G03	10	G3/8	10	18.4	18.4	4.2	27.5	12	98.5	7.5	60.8	37	20
APKD10-G04	10	G1/2	10	18.4	18.4	4.2	27.5	12	101.5	10	60.8	37	24